

Fantastic Economy And Value Pallet Truck




Model: BF

- Most standard and popular model with capacity 2500 - 3500kgs.
- Complete pump design with reliable leak-proof pump eliminating maintenance and extending the service time.
- 210 steering arc, and small turning radius.
- Fork Lowering speed is controllable, operated by hand control and foot pedal.
- Ergonomic rubber wrapped handle, which is comfortable and convenient to operate.
- Entry / exit roller, more freely travel.
- Equipped with over-load valve, with long service time.
- Option: 1) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
2) Fork length: 800mm, 900mm, 1000mm.
3) Foot pedal release.
4) Pump color: black painting, silver painting, silver galvanized.



Option: fully rubber wrapped handle

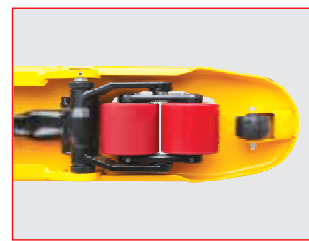


Entry roller for easy operation




Conform to EN ISO3691-5:2009
Based on Directive 2006/42/EC



- 3 position hand control - Raise, Lower, Neutral.
- 12 lubrication grease nipples on all movable parts for easy maintenance.
- Adjustable pump cap ensures a long service life.
- Ergonomic large rubber handle with three control lever.

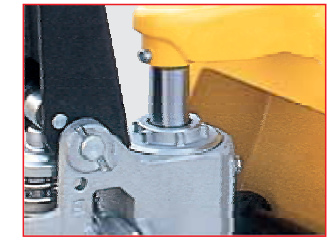

Adjustable pump cap

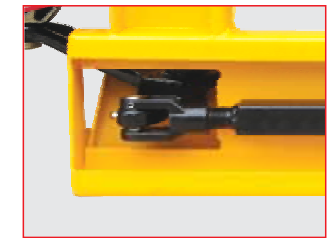

Adjustable straight tappet

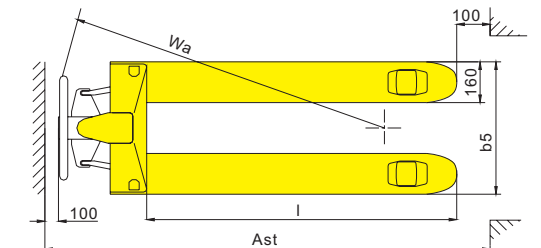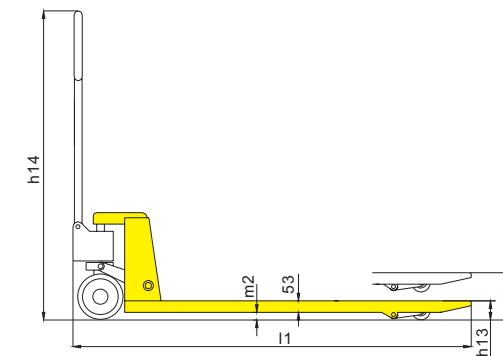

(MM)

Remark: Special size for width and length can be made according to customer's requirement.

1KG=2.205LB 1INCH=25.40MM

Model	BF		
Capacity	Q(kg)	2500/3000	2500/3000
Lowered fork height	h_{13} (mm)	85	75
Steering wheel	mm	ϕ 200	ϕ 180
Fork wheel single	mm	ϕ 80x93	ϕ 74x93
Fork wheel tandem	mm	ϕ 80x70	ϕ 74x70
Max. lift height	h_3 (mm)	200	190
Total height	h_{14} (mm)	1224	1214
Overall length	l_1 (mm)	1483/1533/1603	1483/1533/1603
Fork length	l (mm)	1100/1150/1220	1100/1150/1220
Width overall forks	b_5 (mm)	520/550/685	520/550/685
Ground clearance, centre of wheelbase	m_2 (mm)	32	22
Aisle width for pallets 1000x1200 crossways	A_{81} (mm)	1733/1733/1803	1733/1733/1803
Aisle width for pallets 800x1200 lengthways	A_{81} (mm)	1883/1783/1803	1783/1783/1803
Turning radius	W_8 (mm)	1216/1266/1336	1216/1266/1336
Service weight	kg	65-80	65-80